

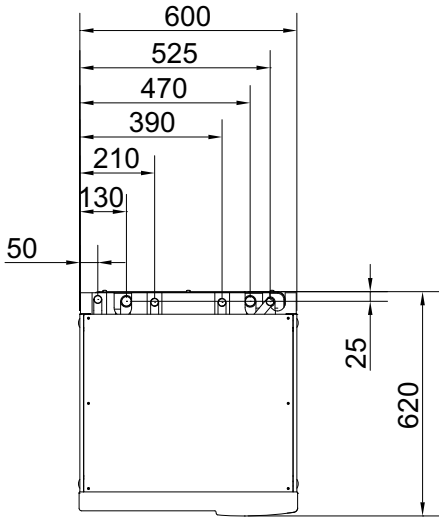


Dimensions and setting-out coordinates

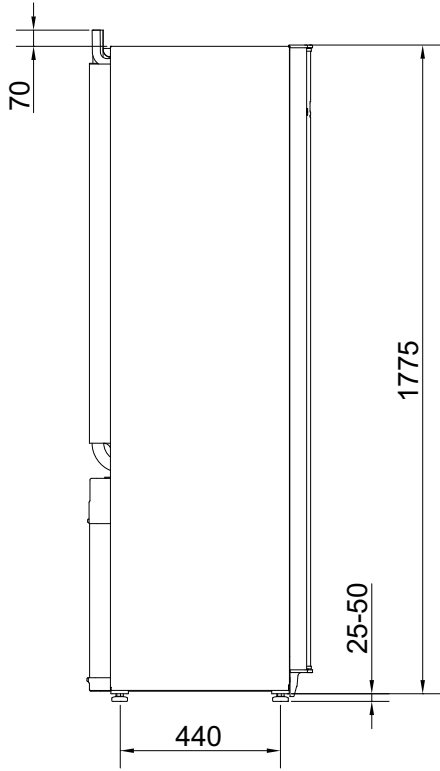

Technical specifications

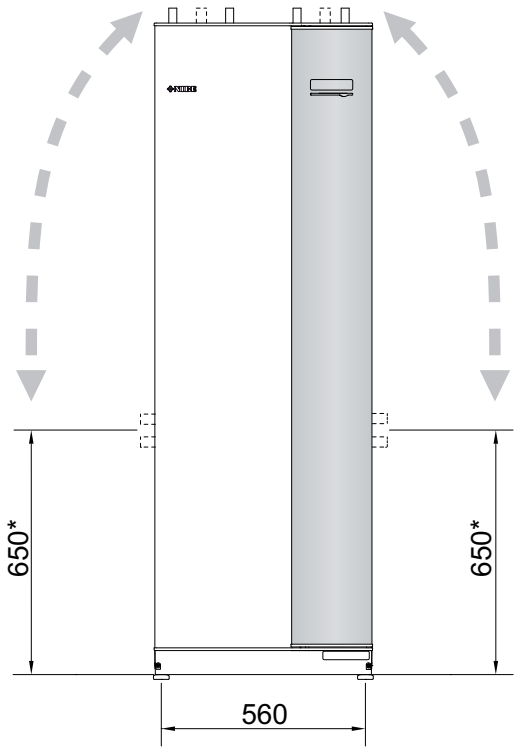

1x230 V		5
Output data according to EN 14511		
0/35		
Rated output	kW	4.65
Electrical output	kW	1.08
COP _{EN14511}	-	4.30
0/45		
Rated output	kW	3.98
Electrical output	kW	1.17
COP _{EN14511}	-	3.40
Additional power	kW	1/2/3/4/5/6/7
SCOP according to EN 14825		
Nominal heating output (designh)	kW	6 / 5
SCOP _{EN14825} cold climate 35 °C / 55 °C		4.6 / 3.5
SCOP _{EN14825} average climate, 35 °C / 55 °C		4.5 / 3.4
Energy rating, average climate		
Efficiency class for space heating 35 °C / 55 °C		A++ / A++
Space heating efficiency class of the system 35 °C / 55 °C ¹⁾		A+++ / A++
Efficiency class hot water / charging profile		A / XL
Electrical data		
Rated voltage		230V ~ 50Hz
Max operating current, compressor (Including Control system and Circulation pumps)	A _{rms}	9.5
Starting current	A _{rms}	23
Max permitted impedance at connection point ¹⁾	ohm	-
Max operating current heat pump incl. 1 – 2 kW immersion heater (Recommended fuse rating)	A _{rms}	18(20)
Max operating current heat pump incl. 3 – 4 kW immersion heater (Recommended fuse rating)	A _{rms}	27(32)
Max operating current heat pump incl. 5 – 6 kW immersion heater (Recommended fuse rating)	A _{rms}	36(40)
Max operating current heat pump including 7 kW immersion heater (Recommended fuse rating)	A _{rms}	40(40)
Output, Brine pump	W	30 – 87
Output, Heating medium pump	W	7 – 63
IP class		IP21
Refrigerant circuit		
Type of refrigerant		R407C
Volume	kg	1.2
Cut-out value pressostat HP	MPa	2.9 (29 bar)
Difference pressostat HP	MPa	0.7 (-7 bar)
Cut-out value pressostat LP	MPa	0.15 (1.5 bar)
Difference pressostat LP	MPa	0.15 (1.5 bar)
Brine circuit		
Energy class Brine pump		low energy
Max system pressure brine	MPa	0.3 (3 bar)

1x230 V		5
Min system pressure brine	MPa	0.05 (0.5 bar)
Min flow	l/s	0.19
Nominal flow	l/s	0.23
Max external avail. press at nom flow, heating/cooling operation	kPa	63/62
Max/Min incoming Brine temp	°C	see diagram
Min. outgoing brine temp.	°C	-12
Heating medium circuit		
Energy class circ-pump		low energy
Max system pressure heating medium	MPa	0.4 (4 bar)
Min system pressure heating medium	MPa	0.05 (0.5 bar)
Min flow	l/s	0.08
Nominal flow	l/s	0.10
Max external avail. press at nom flow	kPa	49
Max/Min heating medium temp	°C	see diagram
Sound power level (L_{WA}) acc to EN 12102 at 0/35	dB(A)	37
Sound pressure level (L_{PA}) calculated values according to EN ISO 11203 at 0/35 and 1m range	dB(A)	21.5
Pipe connections		
Brine ext diam. CU pipe	mm	28
Heating medium ext diam. CU pipes	mm	22
Hot water connection external diam	mm	22
Cold water connection external diam	mm	22

3x400 V		5	6	8	10
Output data according to EN 14511					
0/35					
Rated output	kW	4.65	6.07	7.67	9.66
Installed electrical output	kW	1.08	1.32	1.64	2.01
COP _{EN14511}	-	4.30	4.59	4.68	4.81
0/45					
Rated output	kW	3.98	5.19	6.70	8.55
Installed electrical output	kW	1.17	1.46	1.83	2.27
COP _{EN14511}	-	3.40	3.56	3.67	3.77
Additional power	kW	1/2/3/4/5/6/7 (switchable to 2/4/6/9)			
SCOP according to EN 14825					
Nominal heating output (designh)	kW	6 / 5	7 / 6	9 / 8	12 / 10
SCOP _{EN14825} cold climate 35 °C / 55 °C		4.6 / 3.5	5.0 / 3.7	5.1 / 3.8	5.1 / 3.9
SCOP _{EN14825} average climate, 35 °C / 55 °C		4.5 / 3.4	4.8 / 3.6	4.9 / 3.7	5.0 / 3.8
Energy rating, average climate					
Efficiency class for space heating 35 °C / 55 °C		A++ / A++	A++ / A++	A++ / A++	A++ / A++
Space heating efficiency class of the system 35 °C / 55 °C ¹⁾		A+++ / A++	A+++ / A++	A+++ / A++	A+++ / A++
Efficiency class hot water / charging profile		A / XL	A / XL	A / XL	A / XL
Electrical data					
Rated voltage		400V 3N ~ 50Hz			
Max operating current, compressor including control system, circulation pumps and 0 kW immersion heater (Recommended fuse rating)	A _{rms}	9.5(1 phase) (16)	4.6(16)	6.6(16)	6.9(16)
Starting current	A _{rms}	23	18	23	23
Max permitted impedance at connection point ¹⁾	ohm	-	-	-	-
Max operating current heat pump incl. 1 – 2 kW immersion heater (Recommended fuse rating)	A _{rms}	18(20)	13(16)	15(16)	15(16)
Max operating current heat pump incl. 3 – 4 kW immersion heater (Recommended fuse rating)	A _{rms}	18(20)	13(16)	15(16)	15(16)
Max operating current heat pump incl. 5 – 6 kW immersion heater (Recommended fuse rating)	A _{rms}	18(20)	13(16)	15(16)	15(16)
Max operating current heat pump including 7 kW immersion heater, connected upon delivery (Recommended fuse rating)	A _{rms}	18(20)	19(20)	21(25)	21(25)
Max operating current heat pump including 9 kW immersion heater, requires switching (Recommended fuse rating)	A _{rms}	24(25)	19(20)	22(25)	22(25)
Output, Brine pump	W	30 – 87	30 – 87	30 – 87	35 – 185
Output, Heating medium pump	W	7 – 63	7 – 63	7 – 63	7 – 63
IP class		IP21			
Refrigerant circuit					
Type of refrigerant		R407C			
Volume	kg	1.2	1.5	1.8	2.1
Cut-out value pressostat HP	MPa	2.9 (29 bar)			
Difference pressostat HP	MPa	0.7 (-7 bar)			
Cut-out value pressostat LP	MPa	0.15 (1.5 bar)			
Difference pressostat LP	MPa	0.15 (1.5 bar)			

3x400 V		5	6	8	10
Brine circuit					
Energy class Brine pump		low energy			
Max system pressure brine	MPa	0.3 (3 bar)			
Min system pressure brine	MPa	0.05 (0.5 bar)			
Min flow	l/s	0.19	0.25	0.33	0.40
Nominal flow	l/s	0.23	0.30	0.42	0.51
Max external avail. press at nom flow, heating/cooling operation	kPa	63/62	59/55	47/38	84/69
Max/Min incoming Brine temp	°C	see diagram			
Min. outgoing brine temp.	°C	-10			
Heating medium circuit					
Energy class circ-pump		low energy			
Max system pressure heating medium	MPa	0.4 (4 bar)			
Min system pressure heating medium	MPa	0.05 (0.5 bar)			
Min flow	l/s	0.08	0.10	0.13	0.16
Nominal flow	l/s	0.10	0.13	0.18	0.22
Max external avail. press at nom flow	kPa	49	46	47	43
Max/Min heating medium temp	°C	see diagram			
Sound power level (L_{WA}) acc to EN 12102 at 0	dB(A)	37	42	43	43
Sound pressure level (L_{PA}) calculated values according to EN ISO 11203 at 0/35 and 1m range	dB(A)	21.5	27	28	28
Pipe connections					
Brine ext diam. CU pipe	mm	28			
Heating medium ext diam. CU pipes	mm	22			
Hot water connection external diam	mm	22			
Cold water connection external diam	mm	22			

¹⁾Max. permitted impedance in the mains connected point in accordance with EN 61000-3-11. Start currents can cause short voltage dips that could affect other equipment in unfavourable conditions. If the impedance in the mains connection point is higher than that stated it is possible that interference will occur. If the impedance in the mains connection point is higher than that stated check with the power supplier before purchasing the equipment.

Miscellaneous

Miscellaneous		5		6		8		10	
Water heater									
Volume water heater	l	180							
Max pressure in water heater	MPa	1.0 (10 bar)							
Capacity hot water heating (comfort mode Normal) According to EN16147									
Amount of hot water (40 °C)		240		240		235		235	
COP _{DHW} (load profile XL)		2.7		2.8		2.8		2.8	
Dimensions and weight									
Width	mm	600							
Depth	mm	620							
Height	mm	1800							
Required ceiling height ²⁾	mm	1950							
		Rf	E	Rf	E	Rf	E	Rf	E
Weight complete heat pump	kg	220	260	225	265	235	275	240	280
Weight only cooling module	kg	118		123		133		138	
Part number, 1x230V, Stainless		065 154		-		-		-	
Part number, 3x400V, Stainless		065 128		065 129		065 130		065 131	
Part number, 3x400V, Enamel (with energy meter)		065 120		065 121		065 122		065 123	

²⁾With feet dismantled the height is approx. 1930 mm.

Working range heat pump, compressor operation

The compressor provides a supply temperature up to 65 °C, at 0 °C incoming brine temperature, the remainder (up to 70°C) is obtained using the additional heat.

